



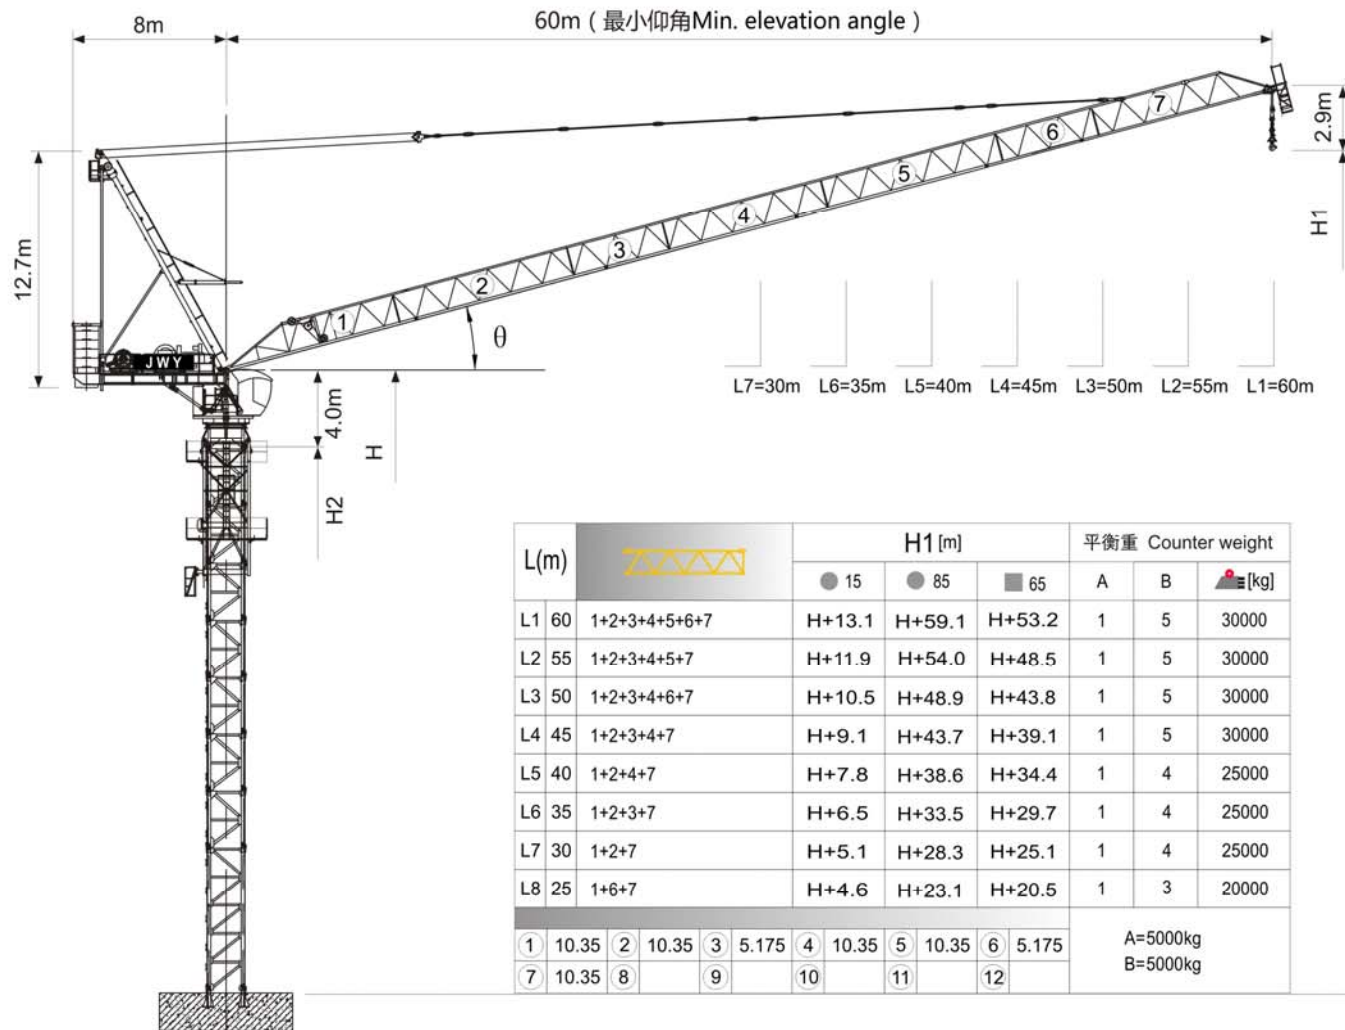

L(m)			H1[m]			平衡重 Counter weight							
			● 15	● 85	■ 65	A	B	 [kg]					
L1	60	1+2+3+4+5+6+7	H+13.1	H+59.1	H+53.2	1	5	30000					
L2	55	1+2+3+4+5+7	H+11.9	H+54.0	H+48.5	1	5	30000					
L3	50	1+2+3+4+6+7	H+10.5	H+48.9	H+43.8	1	5	30000					
L4	45	1+2+3+4+7	H+9.1	H+43.7	H+39.1	1	5	30000					
L5	40	1+2+4+7	H+7.8	H+38.6	H+34.4	1	4	25000					
L6	35	1+2+3+7	H+6.5	H+33.5	H+29.7	1	4	25000					
L7	30	1+2+7	H+5.1	H+28.3	H+25.1	1	4	25000					
L8	25	1+6+7	H+4.6	H+23.1	H+20.5	1	3	20000					
									A=5000kg B=5000kg				
①	10.35	②	10.35	③	5.175	④	10.35	⑤			10.35	⑥	5.175
⑦	10.35	⑧		⑨		⑩		⑪				⑫	

臂根铰点高度 Jib root hinge height

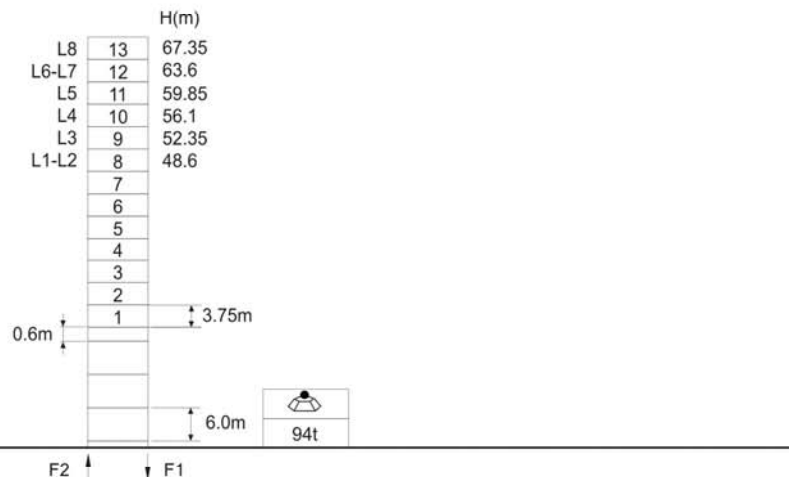


HD23-H20	H	臂根铰点高度 (不包含基础脚) Jib root hinge height (not include the fixing angle)	● 工作状态 In service
2.23m	H1	钩底高度 Height under hook	■ 非工作状态 Out of service
1.95m	H2	塔身高度 Tower body height: $H2 = [H - 4m]$	F 反力 Reactions
自重 (不含平衡重及压重) Total weight of free standing height (excludes counter weight and ballast)			反力请参照说明书
平衡重总重 Total weight of counter weight			Please refer to the user manual for reaction force
如果需要特殊高度请与我们联系。 Please consult with us in case higher freestanding height needed.			

负荷特性 Load diagrams

R	falls	R(C _{MAX})	C _{MAX}	m	20	22	25	27	30	32	35	37	40	42	45	47	50	52	55	57	60
60m	1	5.4~40.4 [49.4°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	8.4	7.4	6.8	6.0	5.6	4.9	4.5	4.0
	2	5.4~31.2 [59.8°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.0	11.3	10.4	9.1	8.4	7.4	6.8	6.0	5.6	4.9	4.5	4.0
55m	1	5.0~41.1 [43.8°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	8.7	7.7	7.1	6.3	5.8	5.2		
	2	5.0~31.6 [56.3°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.2	11.6	10.6	9.4	8.7	7.7	7.1	6.3	5.8	5.2		
50m	1	4.5~41.6 [36.5°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	8.9	7.9	7.3	6.5				
	2	4.5~32.0 [51.7°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.5	11.8	10.9	9.6	8.9	7.9	7.3	6.5				
45m	1	4.1~41.6 [26.8°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	8.9	7.9						
	2	4.1~32.0 [46.5°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.5	11.8	10.9	9.6	8.9	7.9						
40m	1	3.6~40.0 [15.0°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0								
	2	3.6~32.0 [39.5°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.5	11.8	10.9	9.6								
35m	1	3.2~35.0 [15.0°]	9	t	9.0	9.0	9.0	9.0	9.0	9.0	9.0	9.0									
	2	3.2~32.0 [27.7°]	13.5	t	13.5	13.5	13.5	13.5	13.5	13.5	11.8										
30m	1	2.7~30.0 [15.0°]	9	t	9.0	9.0	9.0	9.0	9.0												
	2	2.7~25.9 [33.5°]	18	t	18.0	18.0	18.0	17.0	14.8	13.5	11.8	10.9	9.6								
25m	1	2.3~25.0 [15.0°]	13.5	t	13.5	13.5	13.5														
	2	2.3~25.0 [15.0°]	18	t	18.0	18.0	18.0														

附着 Anchorages

An[m]	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10
H2 [m]	-	-	-	-	-	-	-	-	-	-
※ 超过此高度请联系我们 Over this height please contact us										



机构 Mechanisms

	100LVF45KW-Q		m/min	0 ~ 38	0 ~ 76	75kW	 700m >700m※
			t	9.0	4.5		
			m/min	0 ~ 25	0 ~ 50		
			t	13.5	6.75		
			m/min	0 ~ 19	0 ~ 38		
	t	18	9.0				
	75VVF45KW	15~80°		2min40s		55kW	
	RCV145	rpm		0 ~ 0.7		2x7.5kW	
	380V 50Hz(±5%)			175kVA		kVA	
	380V 60Hz(±5%)						
	440V 60Hz(±5%)						
※ 请联系我们 Please consult us △ 可选 Option							