




Counter-jib Ballast		2900-1800 KG		
		(kg)	PHZ2900	PHZ1800
65m	15.3m	17400	6	0
60m	15.3m	16300	5	1
55m	15.3m	16300	5	1
50m	15.3m	14500	5	0
45m	15.3m	13400	4	1
40m	15.3m	11600	4	0
35m	15.3m	10500	3	1
30m	15.3m	8700	3	0

Final product specification shall be in accordance with purchase order or sales contract only


塔身 Masts / 反力 Reactions / T6513-8B

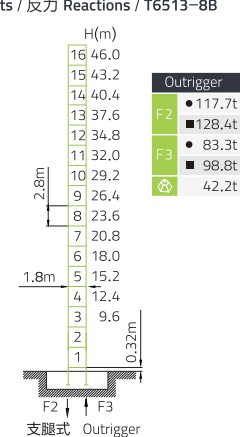

Outrigger	
F2	● 117.7t ■ 128.4t
F3	● 83.3t ■ 98.8t
	⊕ 42.2t




Chassis	
F1	● 66.9t ■ 75.7t
	⊕ 47.1t ⊖ 54.8t



Mobile	
F1	● 66.9t ■ 75.7t
	⊕ 51.2t ⊖ 54.8t

- Reactions in service
- Reactions out of service
- ⊕ Weight with max free-standing height, max jib (without counter-weight and load)
- ⊖ Ballast weight with max free-standing height

附着 Anchorages / T6513-8B

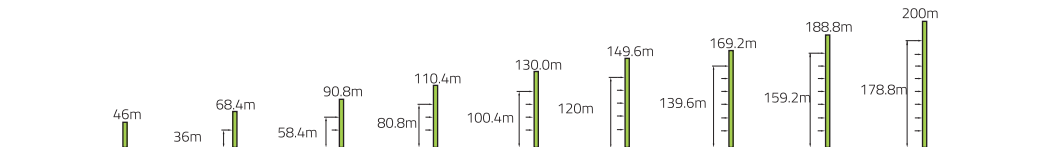


100t/m





T6513-8

■ 塔身 Masts / 反力 Reactions / T6513-8E

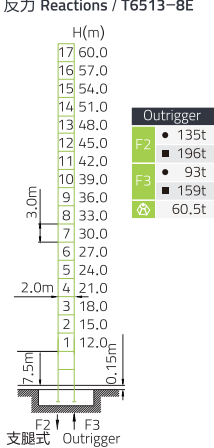

■ 附着 Anchorages / T6513-8E

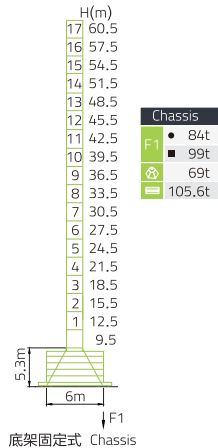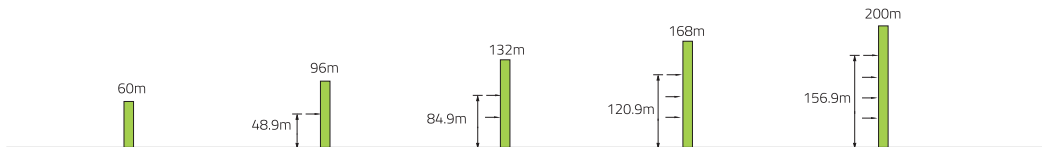


底架固定式 Chassis



行走式 Mobile



- 工作状态反力
Reactions in service
- 非工作状态反力
Reactions out of service
- ⊕ 独立高度、最大起重臂的自重（不含平衡重、吊重）
Weight with max free-standing height, max jib (without counter-weight and load)
- ≡ 独立高度、最大起重臂长时的压重重
Ballast weight with max free-standing height

■ 塔身 Masts / 反力 Reactions / T6513-8F

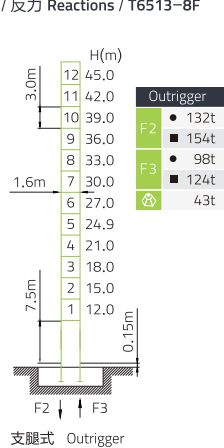

支腿式 Outrigger

■ 附着 Anchorages / T6513-8F

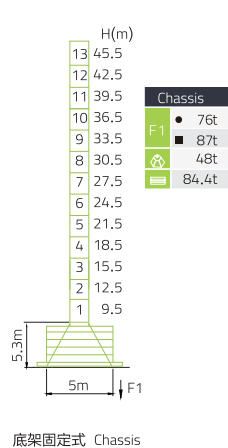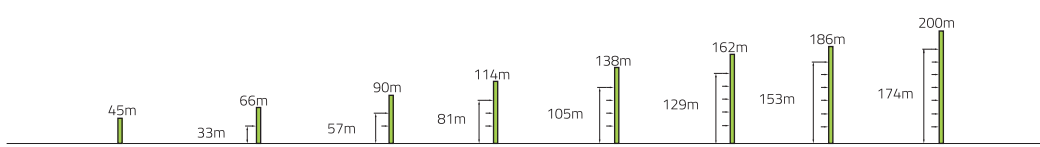

底架固定式 Chassis



行走式 Mobile

- 工作状态反力
Reactions in service
- 非工作状态反力
Reactions out of service
- ⊕ 独立高度、最大起重臂的自重（不含平衡重、吊重）
Weight with max free-standing height, max jib (without counter-weight and load)
- ≡ 独立高度、最大起重臂长时的压重重
Ballast weight with max free-standing height

100t-m

Load Diagrams

 R (m)		Max.Capacity m/t	2.5~15	20	25	30	35	40	45	50	55	60	65
65m (R=66.3m)		2.5~28.88/4.00	4.00			3.82	3.14	2.64	2.25	1.94	1.69	1.48	1.30
		2.5~15.93/8.00	8.00	6.13	4.69	3.74	3.07	2.57	2.18	1.87	1.61	1.40	1.23
60m (R=61.3m)		2.5~31.00/4.00	4.00				3.44	2.90	2.48	2.15	1.88	1.65	
		2.5~17.08/8.00	8.00	6.66	5.11	4.09	3.37	2.83	2.41	2.07	1.80	1.58	
55m (R=56.3m)		2.5~32.40/4.00	4.00				3.64	3.07	2.63	2.28	2.00		
		2.5~17.84/8.00	8.00	7.01	5.39	4.32	3.56	3.00	2.56	2.21	1.93		
50m (R=51.3m)		2.5~32.56/4.00	4.00				3.66	3.09	2.65	2.30			
		2.5~17.93/8.00	8.00	7.05	5.42	4.35	3.58	3.02	2.58	2.23			
45m (R=46.3m)		2.5~32.55/4.00	4.00				3.66	3.09	2.65				
		2.5~17.92/8.00	8.00	7.05	5.42	4.34	3.58	3.02	2.58				
40m (R=41.3m)		2.5~32.23/4.00	4.00				3.61	3.05					
		2.5~17.75/8.00	8.00	6.97	5.35	4.29	3.54	2.98					
35m (R=36.3m)		2.5~31.43/4.00	4.00				3.50						
		2.5~17.31/8.00	8.00	6.77	5.20	4.16	3.43						
30m (R=31.3m)		2.5~30.00/4.00	4.00										
		2.5~17.11/8.00	8.00	6.63	5.11	4.10							

Mechanisms

配置 Configuration			b		bb		kW	
			IV	V	IV	V		
 Hoisting	H30FP20~400	m/min	40	80	20	40	30	400m(6 layers)
		t	4	2	8	4		
	QP8100D2	m/min	50	100	25	50	37	610m(5 layers)
		t	4	2	8	4		
 Slewing	HPW75.130A	r/min	0~0.7				2×7.5	① Consultus if overtop
 Trolleying	BP40B	m/min	0~55				4.0	
 Travelling	ZA52-D/ B52-D	m/min	0~25				2×5.2	
	380V(±10%)50Hz							

100t-m